



Series LEN




- LEN (Materials)**
- Flange/Threaded body: Aluminium
 - Tube: Brass (AISI 304 on request)
 - Float: Nylon foam (AISI 316 on request)
 - O-Ring: NBR
 - Circlip: Phosphor bronze
 - Contact: N.C. reed (N.O. on request)
 - Protection rating: IP65
 - Max switching capacity: 80 W
 - Max switching current: 1 A
 - Max switching voltage: 250 Vac
 - Fluid specific gravity: > 0.75

Weight
 185 g (For 1 float L=150 mm)
 230 g (For 2 floats L=200 mm)

Dimension

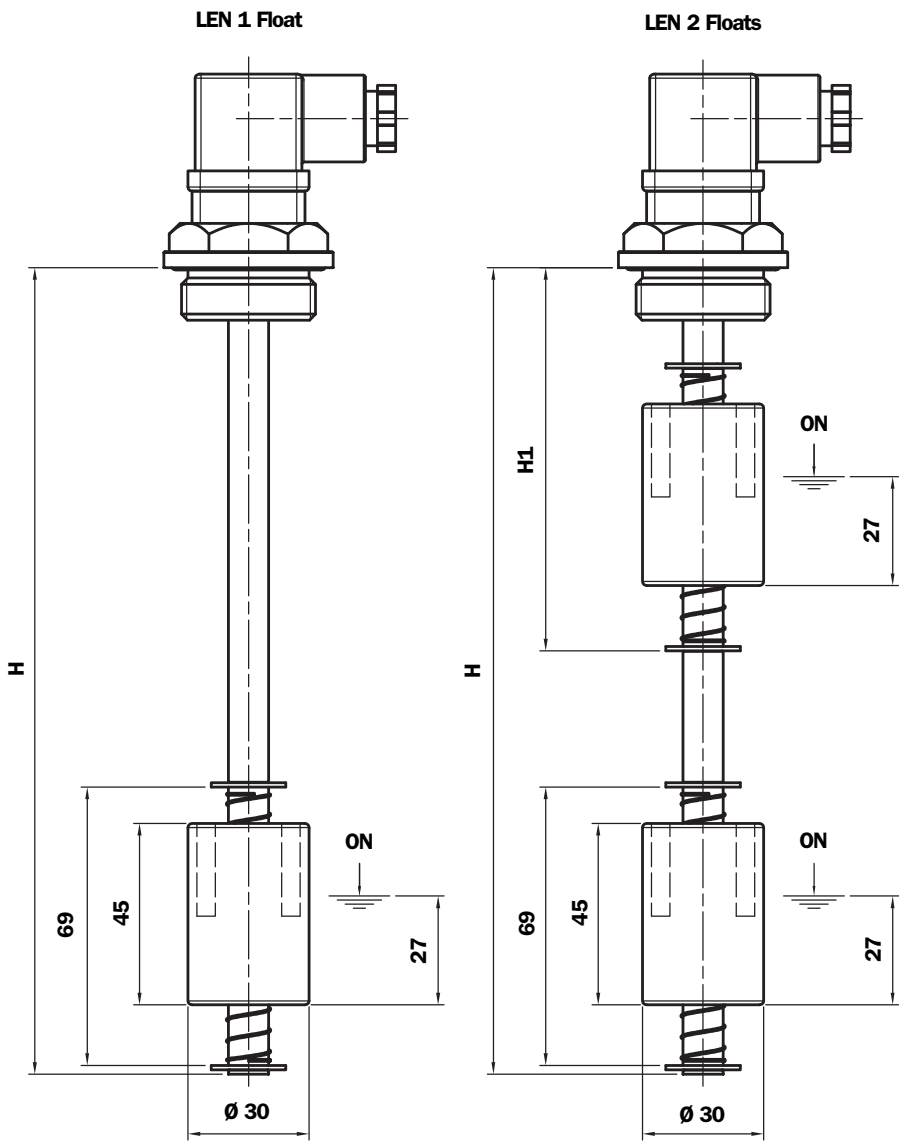

To invert the contact status from NO to NC and vice versa, simply invert the float.

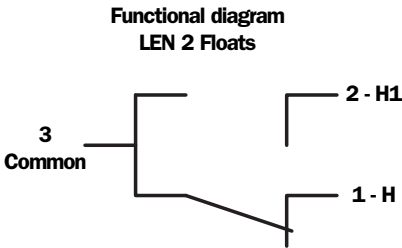

To invert the contact status from NO to NC and vice versa, simply invert the float.

Length	H	H1
100	100	-
150	150	-
200	200	95
250	250	105
300	300	105
350	350	115
400	400	115
500	500	125

Ordering information LEN

Electrical float level indicators series LEN

Example: LEN

1	2	3	4	5	6	7	8	9
								
A	200	2	A	1	A	F	S	P01

1 - Tube material

A	Brass
B	AISI 304 (special on request)

2 - Length

150
200
250
350
400
500

3 - Number of float

1	Nr. 1 float
2	Nr. 2 floats (starting from size 200)

4 - Float material

A	Nylon foam
B	AISI 316 (special on request)

5 - Contact

1 NC

6 - Seals

A NBR

7 - Type of fixing

F	3 hole flange
G	G 1" thread

8 - Electrical connection

S DIN 43650 connector

9 - Options

P01	MP Filtri standard
Pxx	On request

MP Filtri - The filter functions as described in this bulletin are valid exclusively for original MP Filtri filter elements and replacement parts. All rights reserved

The data in this publication are purely guideline. MP Filtri reserves the right to make changes to the models described herein at any time it deems fit in relation to technical or commercial requirements. The colours of the products shown on the cover are purely guideline. Copyright. All rights reserved.