


## Dimensions

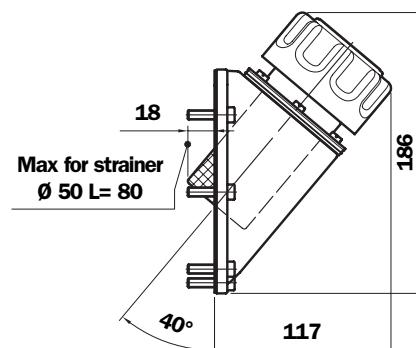

**Flow rate with  $\Delta p$ : 0,02 bar**

Filtration	l/min
3 $\mu m$	450
10 $\mu m$	550

**Weight**

TAF 80: 0,655 Kg

For tank hole see "SMF 1" page 18.

## Ordering information

**Filler cap**  
**TAF80**  
**Example: TAF80**    **1**   **2**   **3**   **4**   **5**   **6**   **7**   **8**  
                          **B**   **03**   **A**   **1**   **L**   **1**   **M**   **P01**

**1 - Filler cap connection**

**B** Flange with bayonet connection

**2 - Filter element**

**00** Without filter (Blank filler cap)  
**03** 3  $\mu m$  - Impregnated paper  
**10** 10  $\mu m$  - Polyurethane

**3 - Seal**

**A** NBR  
**B** Cork gasket

**4 - Pressurisation valve**

**0** Without  
**1** 0,3 bar pressurisation valve  
**2** 0,7 bar pressurisation valve  
**9** Anti-splash feature (only with filter element 3  $\mu m$ )

} Only with seal NBR

**5 - Variants**

**0** Standard  
**L** With Padlock tab

**6 - Basket**

**0** Without  
**1** L= 80 mm

**7 - Connection to reservoir**

**M** Fixing with Metric screws  
**U** Fixing with UNC screws

**8 - Options**

**P01** MP Filtri standard