

Technical drawing of a mechanical part, showing a cross-section view (left) and a top view (right).

Cross-section View (Left):

- Overall width: 35
- Central hole diameter: $\phi 39^{+0.2}_0$
- Four smaller holes: $4-\phi 17$
- Surface finish symbol: $Rc1\frac{1}{4}$ and $\sqrt{3.2}$
- Dimension lines indicate a distance of 4 from the top edge to the center of the central hole, and a distance of 4 from the bottom edge to the center of the central hole.

Top View (Right):


- Overall width: 80
- Overall height: 80
- Central hole diameter: $\phi 39^{+0.2}_0$
- Four smaller holes: $4-\phi 17$
- Dimension lines indicate a distance of 58.7 from the top edge to the center of the central hole, and a distance of 30.2 from the center of the central hole to the center of one of the smaller holes.
- Surface finish symbol: $\sqrt{3.2}$ (labeled 周边)

- 1.各孔口及棱边去刺;
- 2.未注圆角R1 R2;
- 3.0型圈: 45X3.1 GB1235-1976;
- 4.内六角螺钉: 4-M10X30 GB/T70-1985。

					45							
标记	处数	更改文件号	签 字	日期							YLH2-* 进油口法兰	
设 计			标准化		图 样 标 记			重 量	比 例		YLH1-20、25	
校 对			审 定								RYLH ₂ ¹ Rc 10	
审 核												
工 艺			日 期		共 页 第 页							

A-A

其余 $\sqrt{12.5}$

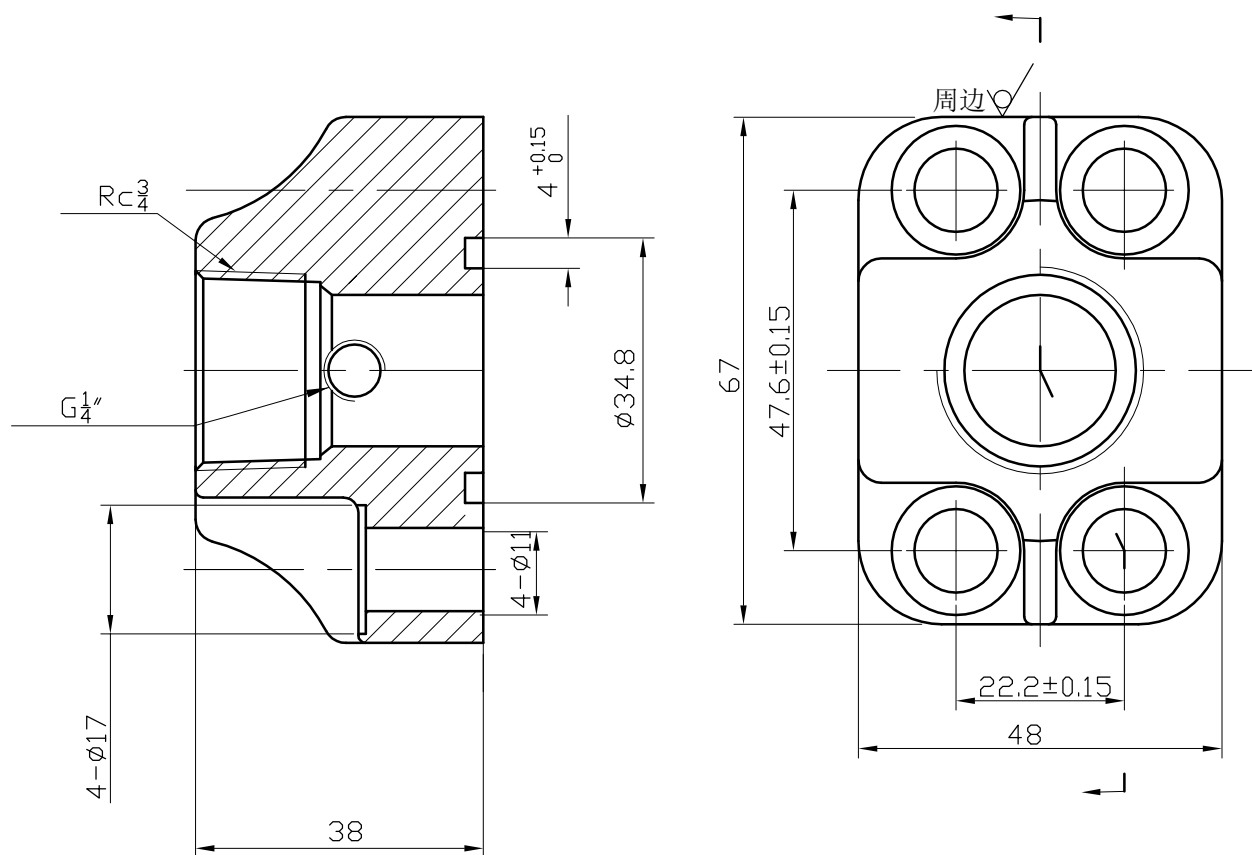

技术要求

- 1.各孔口及棱边去刺;
- 2.未注圆角R1 R2;
- 3.O型圈: 35X3.1 GB1235-1976;
- 4.内六角螺钉: 4-M10X30 GB/T70-1985。

适用于YLH1-20、25, YLH2-25、32出油口

					45				浙江永灵液压机械有限公司	
									YLH1- ²⁰ / ₂₅ 出油口法兰	
									PYLH1Rc 06(测压)	
标记	处数	更改文件号	签 字	日期	图 样 标 记				重 量	比 例
设 计			标准	化						
校 对			审 定							
审 核										
工 艺			日 期		共 页 第 页					