

焊接式隔膜式蓄能器 (欧标系列)

Welded Diaphragm Accumulators (European Standard)

涿鹿高压容器

单元尺寸：100 至 250 bar (以 mm 为单位的单元尺寸)


Unit dimension: 100 to 250 bar (dimension in mm)

1 气体接头形式 "1"

Gas connection form "1"


2 标识

Marking

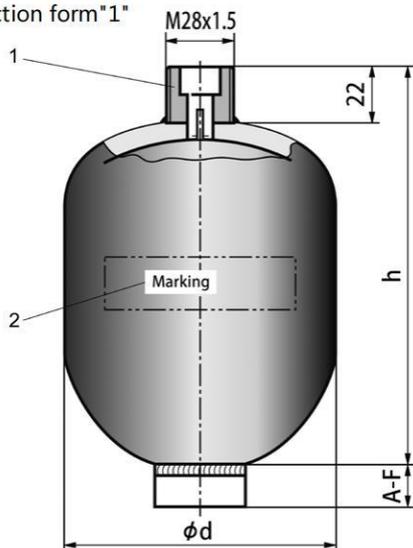


类型 / V (lit.) Type / V in liters	P 最大 (bar) P max	Φd	h	21L	M	N	重量 Weight (kg)
AD0.075	250	64	87	20	21.5	12	0.8
AD0.16	250	74	96	20	24	12	1.3
AD0.32	210	92	114	22	33	18	1.6
AD0.4	250	100	118	22	—	—	1.9
AD0.5	250	106	134	20	27	12	2.4
AD0.7	210	126	148	22	33	18	4.0
AD1.0	210	136	158	22	33	18	4.5
AD1.4	210	136	199	22	33	18	5.5
	130	152	172	22	33	18	5.0
AD2.0	130	152	210	22	33	18	6.0
	210	174	183	22	33	18	10.5
AD2.8	130	219	200	21	33	18	8.0
	210	174	247	21	33	18	11.5
AD3.5	210	174	276	21	33	18	13.3
AD6.0	120	219	305	21	33	18	15.4

安装类型 / Fluid port type

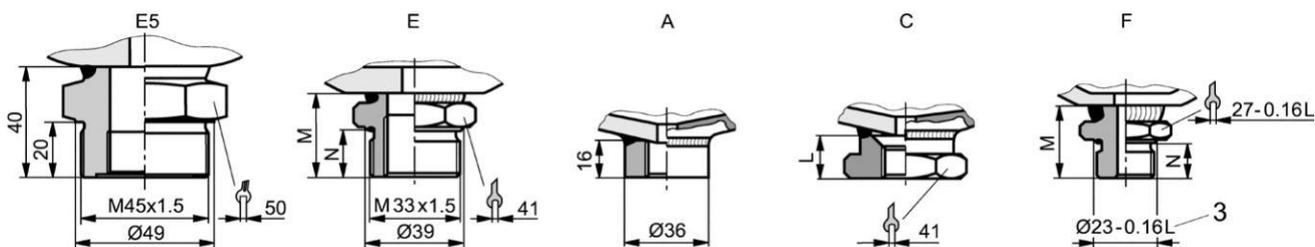

欧洲标准类型的单元尺寸：130 到 250 bar；0.7 到 3.5 lit. (以 mm 为单位的单元尺寸)

Unit dimension of European Standard types: 140 to 250 bar; 0.7 to 3.5 liters (dimension in mm)

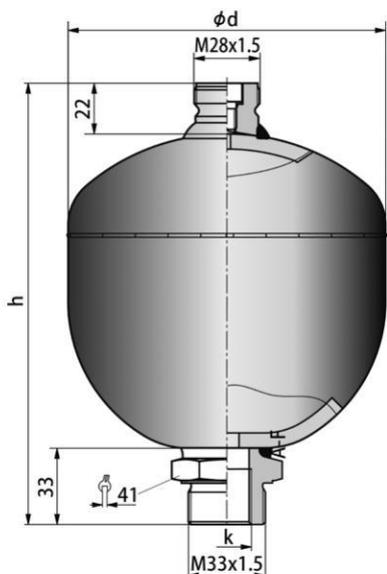

订货代码 / 类型 Model Code / Type	体积 (lit.) Volume	h	Φd	k
AD0.7-210-1X	0.7	181	126	G 1/2"
AD1.0-210-1X	1.0	191	136	
AD1.4-210-1X	1.4	232	136	
AD2.0-210-1X	2.0	215	174	
AD2.8-210-1X	2.8	280	174	
AD3.5-210-1X	3.5	310	174	