



6

T 系列高压柱销式叶片泵

T Series Pin Vane Pumps with High Pressure

Products Introduction

This product use float side panel, vane of dowel pin structure, technics of double-edged vane and wholly new low noise technology cure to process stator. Compared with other dosing vane pump, its advantages are:

High working pressure – it can reduce the size of hydraulic actuator ,control valves and tubing, which makes for cutting the cost, you can also extend its working life by lowering the working pressure.

High efficiency – both volumetric and mechanical efficiency are higher than 94%,so it helps to raise productivity, reduce heating and running cost.

Smaller pressure fluctuation – it will reduce the noise of tubing and extend operating life of other hydraulic element.

High fouling resistance –using vane of double lips structure provides high fouling resistance and long operation life

Low noise – the vane structure of dowel pin which can decrease the force on the stator which comes from vane efficiently. We also adopt wholly new low noise technology stator, so it produces little noise. And the T*L series pumps with thicker body make for reducing mechanical amp litude and lower noise.

Wide speed range – combining pump core which has large displacement with smaller pump body to produce large displacement pumps with low noise.

In particular, this series of products is suitable for cutting machinery plastic machinery, leather machinery, pressing machinery, engineering machinery, metallurgical machinery and so on.



Application Specification

Initial Startup Checks Check the accuracy of design and installation of hydraulic station:

Make the distance between inlet and outlet as long as possible.

The pipe orifice of inlet and outlet should be slope and the section angle should be greater than or equal to

45° , in order to increase passage section ,slower velocity, recommend velocity in inlet is between 0.5m/s and 1.9m/s. and in outlet is below 6m/s.

Confirm the oil ports are below the oil level in fuel tank in the worst-case scenario (example: all of hydraulic cylinder pistons are extending to the extreme position),

Specifications of the air filter should be three times greater than the maximum return flow.

Set the release valve for exhaust on oil returning pipe; and you can also slightly loosen the joint of pump outlet to vent until there are no bubbles in the oil spill, then you can tighten the joint to produce the same effect.

Notice: This method is suitable for low pressure and you should make sure the pressure will not rise.

Initial start:

Check the accuracy of the location of oil ports.

Pump should vent well when injecting oil.

Inching running the pump for a few seconds, and you should loosen the relief valve on the outlet to reach the minimum pressure.

Do not drive the pump in a high speed and pressure before the check is over.

Application Specification

Shaft&Coupling

Coupling&spline hole

Coupling spline hole should be able to float and automatically, such as coupling halves are rigid coupling, the different axis is less than 0.15mm (TIR), in order to reduce wear and inclination angle of two spline axis deviation $< \pm 0.05/25.4\text{mm}$;

Spline hole must be lubricated by molybdenum disulfide lithium-based grease or other similar grease.

Coupling demand heat treatment to reach the hardness of 29~45HRC.

The specification of spline hole should meet the one-level standards in SAE-J498b(1971), as the coordination is flat root and lateral teeth.

Flat spline shaft

T7, T67 and T6 series vane pumps provide a high strength key, hence you must use it when installing or changing the pump, or you can use a new key whose hardness is 27~34HRC and edge angle is $0.8 \sim 1 \times 45^\circ$ to avoid the circular angle in the key slot when it's necessary to change keys.

The load of shaft

The construction of requirement of flat spline shaft is the same to the spline shaft's.

This series products is only allowed to bear transmission load, do not apply radial and axial load.

Application Specification

Hydraulic Fluid

Classification Of Hydraulic Fluid

HF-0、HF-2	: anti-wear hydraulic oil
HF-1	: common hydraulic oil
HF-3	: water in oil emulsion
HF-4	: water-glycol hydraulic fluid
HF-5	: synthetic hydraulic fluid

Recommended hydraulic Oil

We recommend anti-wear hydraulic oil for all the highest rated working parameter and performance parameter are based on the test using the anti-wear hydraulic.

Other Hydraulic Oil

When using other hydraulic oil, you should lower the Max. rated operating parameters of pump. in some situations, you have to raise the min. pressure of the inlet, and you can see related sections for details.

Viscosity

Uppermost Viscosity (cold start mode、 low speed and pressure).....	860cSt
Uppermost Viscosity (full speed and high pressure).....	108cSt
Best viscosity (longest working time)	30cSt
Minimum viscosity (full speed and high pressure , for HF-1、 HF-3、 HF-4、 HF-5)	18cSt
Minimum viscosity (full speed and high pressure , for HF-0、 HF-2)	18cSt

Viscosity Index

The lowest index: 90V.L. high index can extent operating temperature range but it can also shorten the life of working liquid.

Application Specification

Operating Temperature

the operating temperature mainly depends on viscosity ,also it' s related to seal material, and for standard seals , its range is from -30°C to 90°C.

Max. Temperature

HF-0、 HF-1、 HF-2.....+100°C

HF-3、 HF-4.....+50°C

HF-5.....+70°C

Biodegradable hydraulic oil (organic grease and rapeseed oil-based grease)...+100°C

Min. liquid temperature (also depends on Max. viscosity)

HF-0、 HF-1、 HF-2、 HF-5.....-18°C

HF-3、 HF-4.....+10°C

Biodegradable hydraulic oil(organic grease and rapeseed oil-based grease).....-20°C

Operating temperature and Viscosity

Operating temperature depends on the viscosity, variety of working liquid and property of pump. Usually ,we used the most suitable viscosity. And when the hydraulic pump cold start, drive it in conditions of low speed and low pressure to heat up the liquid to a suitable temperature, then operate it under full power.

Cleanliness of working fluid

Solid contamination level of oil is required to be lower than level 8 in NAS1618 (or ISO 18/14) and you can use the filter whose filtrate precision is 25 μm (or $\beta \geq 100$)

Solid contamination level should meet the need of Min. suction pressure. Recommended filter screen 100 mesh (149 μm) , and you' d better enlarge the filter size or remove filter when the system demand cold start or using fire resistant oil.

Water pollution of working fluid

Mineral oil-based grease.....0.1%

Synthetic hydraulic fluid crank case oil and biodegradable hydraulic fluid.....0.05%

The system demand dehydration when moisture content is too high.



技术参数 (单联泵) Technical parameters (single pump)

规格系列 Specifications Series	泵芯规格 PC specification	理论排量 Displacement q _t	最低转速 Min. speed	最高转速 Max. speed		最高压力 Max. pressure							
				HF-0 HF-1 HF-2	HF-3 HF-4 HF-5	HF-0,HF-2		HF-1,HF-4,HF-5		HF-3			
		间歇 Intermittent	连续 Continuous			间歇 Intermittant	连续 Continuous	间歇 Intermittent	连续 Continuous				
		mL/r	r/min	r/min	r/min	bar	bar	bar	bar	bar	bar		
T67B T7BL	B03	10.8	600	2800	1800	320	290	240	210	175	140		
	B05	17.0											
	B06	21.2											
	B08	26.2											
	B10	34.0		2500		300	275						
	B12	37.0											
	B14	46.0											
B17	58.0	280	240										
T6C T6CL	003	10.8	600	2800	1800	275	240	210	175	175	140		
	005	17.0											
	006	21.2											
	008	26.2											
	010	34.0											
	012	37.0											
	014	46.0											
	017	58.0											
	020	63.5											
	022	70.0											
	025	79.0											
	028	89.0		2500		210	160		160				
031	100.0												
T6D T7D T7DS T7DL	014	44.0	600	3000	1800	300	250	240	210	175	140		
	017	55.0											
	020	66.0											
	022	70.3											
	024	81.1											
	028	90.0											
	031	99.2											
	035	113.4		2800		280	230		210			175	160
	038	120.6											
	042	137.5											
	045	145.7											
	050	158.0		2200		210	160						
T6E T7E T7ES T7EL	042	132.3	600	2200	1800	240	210	210	175	175	140		
	045	142.4											
	050	158.5											
	052	164.8											
	054	171.0											
	057	183.3											
	062	196.7											
	066	213.3											
	072	227.1											
085	268.7	2000	90	75	75	75	75	75					

注：HF-0, HF-2= 石油基抗磨液压油；
 HF-1= 石油基液压油（非抗磨）；
 HF-3= 油包水乳化液；
 HF-4= 水乙二醇；
 HF-5= 合成液压油（磷酸酯液等）。

Note: HF-0、HF-2= Anti-wear hydraulic oil
 HF-1= General hydraulic oil
 HF-3= Water in oil emulsions
 HF-4= Water glycol fluid
 HF-5= Synthetic hydraulic fluid (phosphate ester etc.)

技术参数 (双联泵) Technical parameters (Double pumps)

规格系列 Specifications Series	泵芯规格 PC specification	理论排量 Displacement q _t	最低转速 Min. speed	最高转速 Max. speed		最高压力 Max. pressure						
				HF-0 HF-1 HF-2	HF-3 HF-4 HF-5	HF-0, HF-2		HF-1, HF-4, HF-5		HF-3		
		间歇 Intermittent	连续 Continuous	间歇 Intermittent	连续 Continuous	间歇 Intermittent	连续 Continuous					
		mL/r	r/min	r/min	r/min	bar	bar	bar	bar	bar	bar	
T67BB T67CB T67DB T7DBS T7EBS T7BBL	B03	10.8	600	2200	1800	300	275	240	210	175	140	
	B05	17.0										
	B06	21.2										
	B08	26.2										
	B10	34.0				280	240					
	B12	37.0										
	B14	46.0										
	B17	58.0										
T6CC T67CB T67DC T67EC T6DC T6EC T6CCL T7CBL	003	10.8	600	2200	1800	275	240	210	175	175	140	
	005	17.0										
	006	21.2										
	008	26.2										
	010	34.0										
	012	37.0										
	014	46.0										
	017	58.0										
	020	63.5				210	160					
	022	70.0										
	025	79.0										
	028	89.0										
	031	100.0										
T7DBS T6DC T67DC T6ED T7EDS	014	44.0	600	2200	1800	250	210	240	210	175	140	
	017	55.0										
	020	66.0										
	022	70.3										
	024	81.1										
	028	90.0										
	031	99.2										
	035	113.4										
	038	120.6										
	042	137.5										
	045	145.7				210	175					
	050	158.0							160			
T7EBS T6EC T6ED T7EDS	042	132.3	600	2200	1800	240	210	210	175	175	140	
	045	142.4										
	050	158.5										
	052	164.8										
	054	171.0										
	057	183.3										
	062	196.7										
	066	213.3										
	072	227.1				90	75	75	75	75	75	
	085	268.7										

注：HF-0, HF-2= 石油基抗磨液压油；

HF-1= 石油基液压油（非抗磨）；

HF-3= 油包水乳化液；

HF-4= 水乙二醇；

HF-5= 合成液压油（磷酸脂液等）。

Note: HF-0, HF-2= Anti-wear hydraulic oil

HF-1= General hydraulic oil

HF-3= Water in oil emulsions

HF-4= Water glycol fluid

HF-5= Synthetic hydraulic fluid (phosphate ester etc.)



技术参数 (允许的最低吸口绝对压力 bar) Technical parameters (Allow the Min. Suction absolute pressure, bar)

规格系列 Specifications Series	泵芯规格 PC specification	转速 speed r/min									泵芯规格 PC specification		
		1200	1500	1800	2100	2200	2300	2500	2800	3000			
B	B03	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	B03		
	B05										B05		
	B06										B06		
	B08										B08		
	B10							0.84	0.99	0.82	B10		
	B12										B12		
	B14										B14		
	B17										B17		
C	003	0.80	0.80	0.80	0.80	0.80	0.90	1.00		003			
	005									005			
	006									006			
	008									008			
	010					0.85	0.92	1.03	010				
	012								012				
	014					0.90	0.95	1.05	014				
	017								017				
	020				0.90	0.98	1.08	020					
	022							022					
	025				0.90	0.95	1.05		025				
	028								028				
	031								031				
	D				014	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80
017		017											
020		0.82	0.86	1.00	020								
022					022								
024					024								
028					028								
031		0.84	0.97	1.01								031	
035												035	
038												038	
042												042	
045		0.86	1.01					045					
050								050					
052								052					
057								057					
E	062	0.80	0.80	0.80	0.90	1.00					062		
	066										066		
	072										072		
	085										085		
	066			0.85	0.85	0.95					1.00	1.09	066
	072												072
	085			0.90	0.90	1.00							085

表中所列的数值是在以粘度为 10~65cSt 的石油基液压油为工作介质时，在吸口连接法兰处测得的绝对压力，吸口绝对压力相对于大气压的压差不得大于 0.2bar，以防止产生气穴。

对于 HF-3 (油包水乳化液) 和 HF-4 (水乙二醇) 吸口最低绝对压力应为上列数值乘以 1.25；对 HF-5 (合成液液压油) 应乘以 1.35；而对于有机脂类或菜籽油基液压油，则应乘以 1.10。

对于双联泵，吸口绝对压力应以最大规格联的参数选取。

The values are listed in the table in the viscosity of 10 ~ 65cSt petroleum base hydraulic oil as working medium, the suction flange measure absolute pressure, suction absolute pressure relative to the atmospheric pressure differential pressure shall not be greater than 0.2bar, in order to prevent air pockets.





For HF-3 (water-in-oil emulsion) and HF-4 (water glycol fluid)

the Min. absolute suction pressure should be the above value multiplied by 1.25, for HF-5 (synthetic hydraulic oil) should be multiplied by 1.35, and for organic esters or rapeseed oil based hydraulic oil is multiplied by 1.10.

For double pumps, the suction pressure should be selected with the max. specification.

型号说明 Model Code

· 单 泵 Single Pump



T6C		-022	-1	R	00	-A	1	M0		
型号 (示例) Model(example)									油口联接螺纹 Port connection threads	
系列代号 Series Code									公制 Metric units	美制 US units
规格排量 •mL/r Displacement									M0	00(略) Omit
轴 号 Shaft NO.										
旋转方向 (从轴端看) Direction of rotation(view from shaft end) R – 顺时针 (标准 , 可省略) Clockwise (Standard, omit) L – 逆时针 (counter clockwise)										
油口方向组合 : S= 进油口 P= 出油口 Ports directional combination : S= inlet P= outlet										
代号 code	00 (标准配置) Standard features	01	02	03						
油口方向 ports direction										
									设计序号 Design number A : 由生产商给定 A : Given by the manufacturer	



安装联接尺寸 Install Connection Dimensions


• T67B、T6C 单泵 / T67B、T6C Single Pump

重量 weight: 15.7 kg

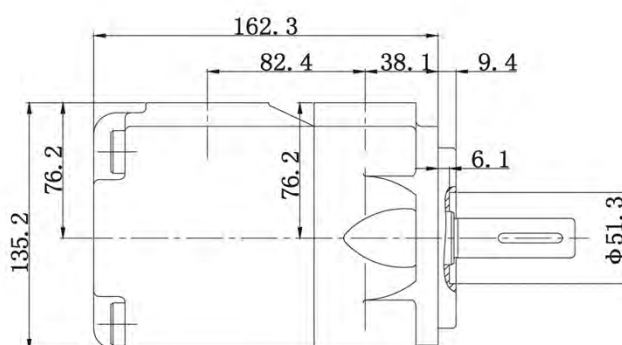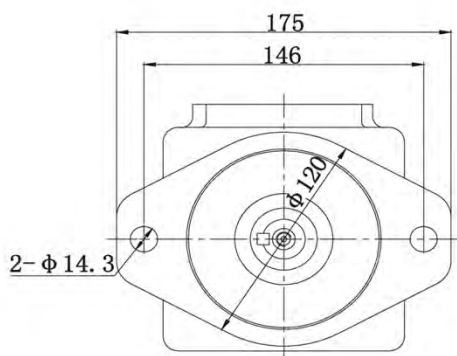


轴的最大扭矩 mL/r×bar
Max. torque of shaft mL/r×bar

轴号 (Shaft NO.)	q×p _{max}
1	16340
2	14300
3	20600
4	21800

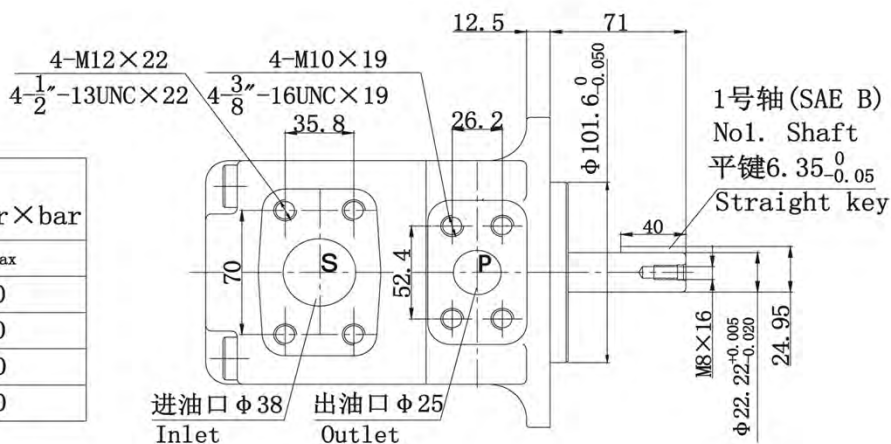

4号轴
No4. Shaft



渐开线花键SAE BB

J498-b 1级精度

平齿根 齿侧配合

齿数 15

齿节 16/32

压力角 30°

大径 φ25⁰_{-0.27}

Involute spline SAE BB

J498-b Class 1

Flat root Side fit spline


Number of teeth 15

Pitch 16/32

Pressure angle 30°

Major diameter φ25⁰_{-0.27}

3号轴
No3. Shaft



渐开线花键SAE B

J498-b 1级精度

平齿根 齿侧配合

齿数 13

齿节 16/32

压力角 30°

大径 φ21.8⁰_{-0.27}

Involute spline SAE B

J498-b Class 1

Flat root Side fit spline


Number of teeth 15

Pitch 16/32

Pressure angle 30°

Major diameter φ21.8⁰_{-0.27}

2号轴 (NO SAE)
No2. Shaft


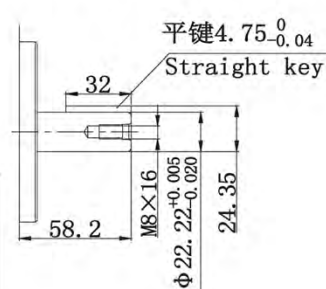


平键 4.75⁰_{-0.04}
Straight key

安装联接尺寸 Install Connection Dimensions


• T6D、T7DS 单泵 / T6D、T7DS Single Pump

重量 weight: 26.0 kg

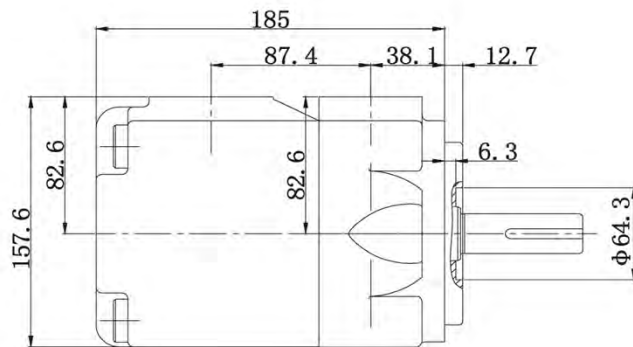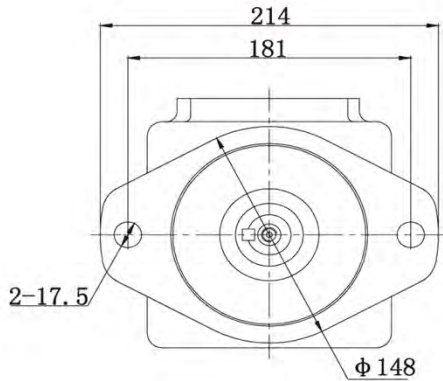


轴的最大扭矩 mL/r×bar
Max. torque of shaft mL/r×bar

轴号 (Shaft NO.)	q×p _{max}
1	43240
2	34590
3	61200
4	61200

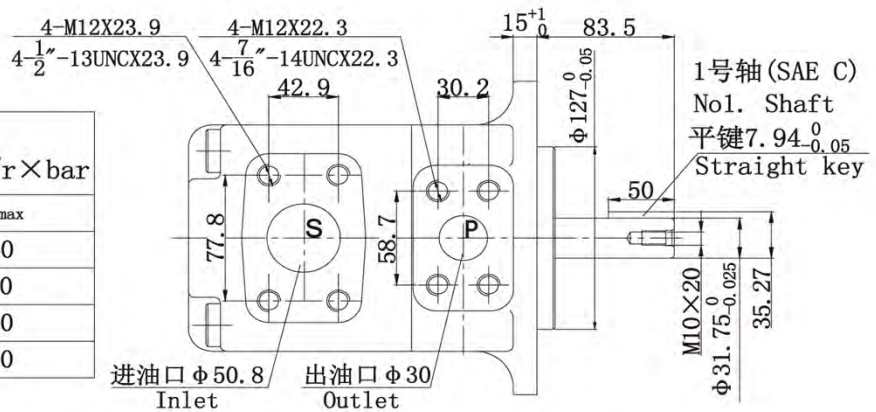

4号轴
No4. Shaft



渐开线花键 NO SAE

J498-b 1级精度

平齿根 齿侧配合

齿数 14

齿节 12/24

压力角 30°

大径 Φ31.2⁰_{-0.24}

Involute spline NO SAE

J498-b Class 1

Flat root Side fit spline


Number of teeth 14

Pitch 12/24

Pressure angle 30°

Major diameter Φ31.2⁰_{-0.24}

3号轴
No3. Shaft



渐开线花键 SAE C

J498-b 1级精度

平齿根 齿侧配合

齿数 14

齿节 12/24

压力角 30°

大径 Φ31.2⁰_{-0.24}

Involute spline SAE C

J498-b Class 1

Flat root Side fit spline


Number of teeth 14

Pitch 12/24

Pressure angle 30°

Major diameter Φ31.2⁰_{-0.24}

2号轴 (NO SAE)
No2. Shaft

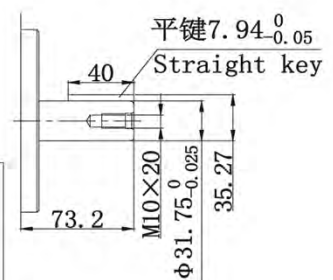




安装联接尺寸 Install Connection Dimensions

· T6E、T7ES 单联泵 / T6E、T7ES Single Pumps


重量 weight: 43.3 kg

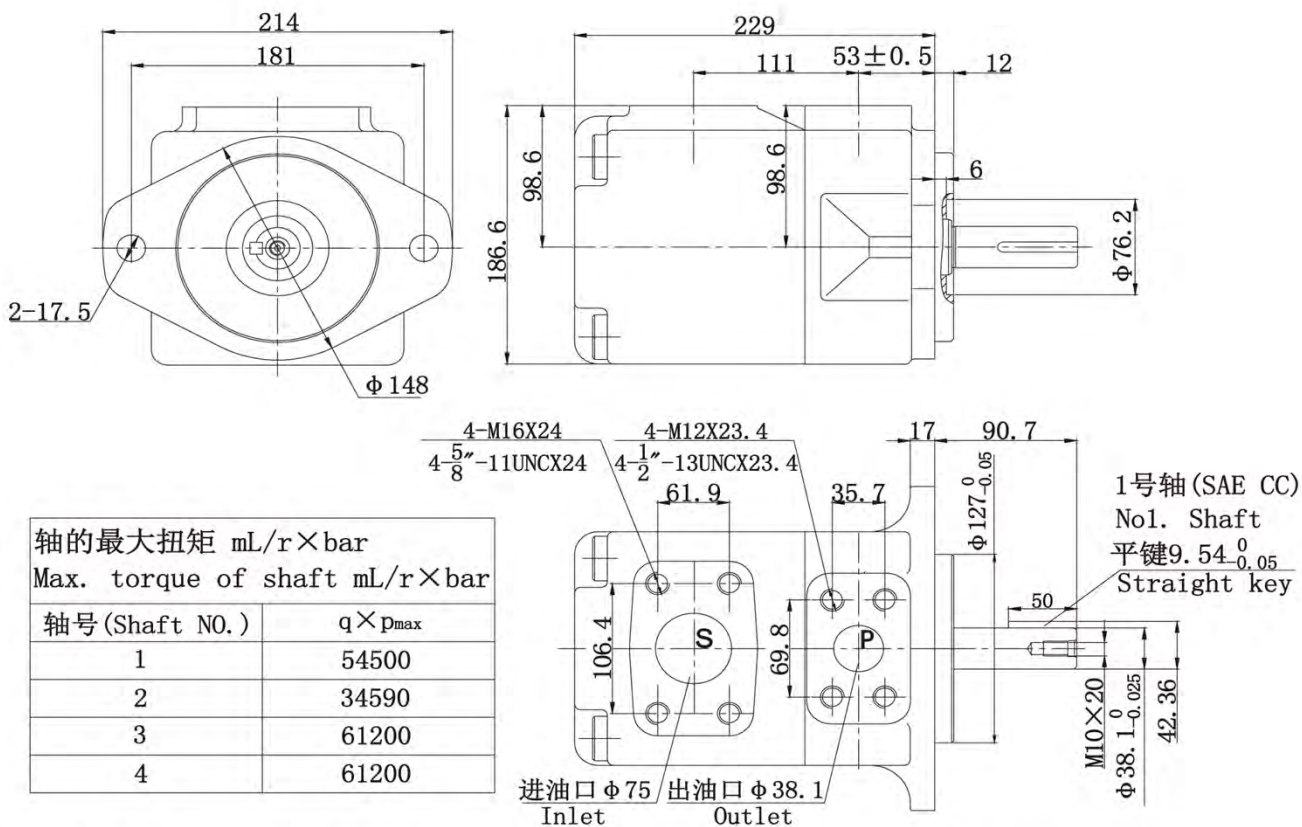

轴的最大扭矩 mL/r \times bar
Max. torque of shaft mL/r \times bar

轴号 (Shaft NO.)	$q \times p_{max}$
1	54500
2	34590
3	61200
4	61200

4号轴
No4. Shaft




渐开线花键SAE CC

J498-b 1级精度
平齿根 齿侧配合
齿数 17
齿节 12/24
压力角 30°
大径 $\phi 37.56_{-0.25}^0$

Involute spline SAE CC
J498-b Class 1

Flat root Side fit spline
Number of teeth 17
Pitch 12/24
Pressure angle 30°
Major diameter $\phi 37.56_{-0.25}^0$

3号轴
No3. Shaft




渐开线花键SAE C

J498-b 1级精度
平齿根 齿侧配合
齿数 14
齿节 12/24
压力角 30°
大径 $\phi 31.2_{-0.24}^0$

Involute spline SAE C
J498-b Class 1

Flat root Side fit spline
Number of teeth 14
Pitch 12/24
Pressure angle 30°
Major diameter $\phi 31.2_{-0.24}^0$

2号轴 (NO SAE)
No2. Shaft

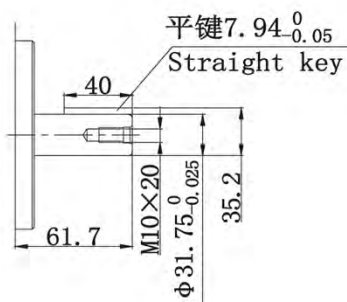


平键 7.94 $_{-0.05}^0$
Straight key


安装联接尺寸 Install Connection Dimensions

· T7BL、T6CL 单联泵 / T7BL、T6CL Single Pumps

重量 weight:19.5 kg

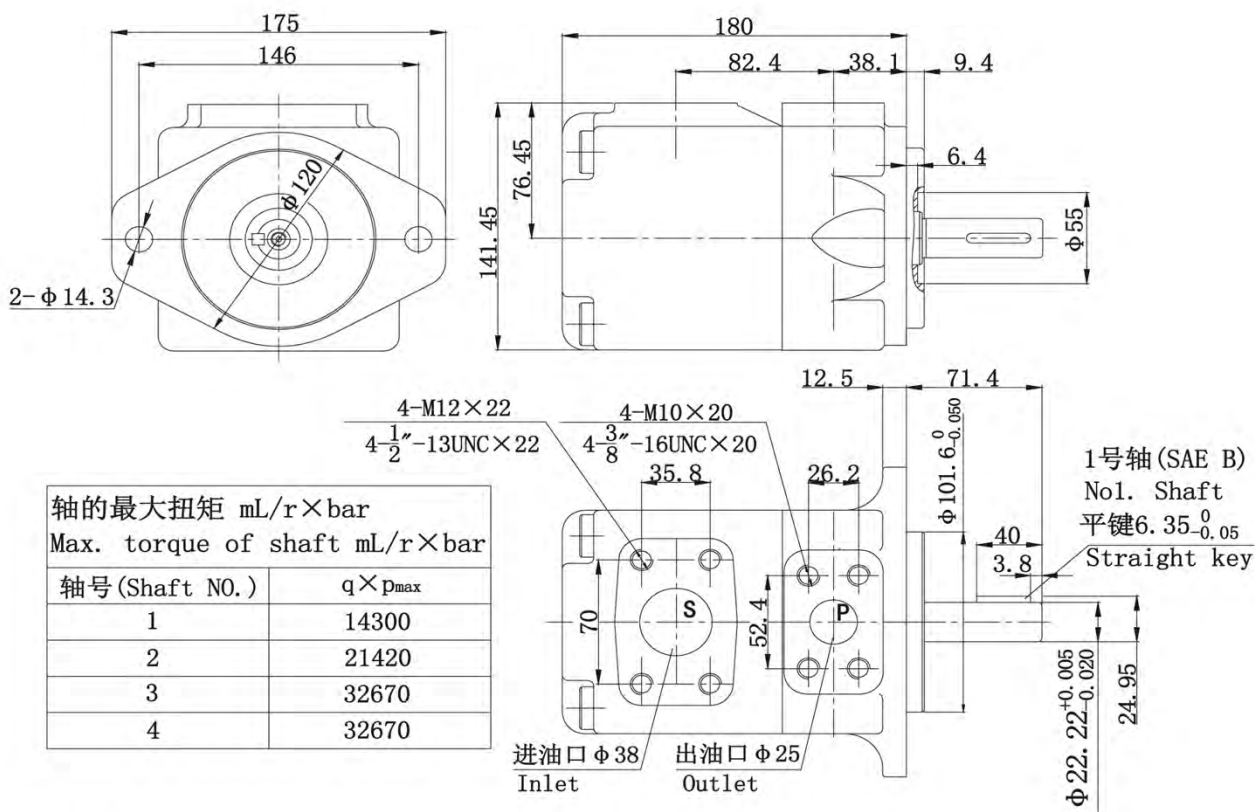


4号轴
No.4. Shaft

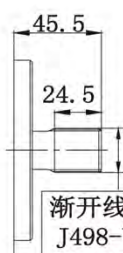

渐开线花键SAE BB
J498-b 1级精度
平齿根 齿侧配合
齿数 15
齿节 16/32
压力角 30°
大径 $\phi 25_{-0.27}^0$

Involute spline SAE BB
J498-b Class 1
Flat root Side fit spline
Number of teeth 15
Pitch 16/32
Pressure angle 30°
Major diameter $\phi 25_{-0.27}^0$


3号轴
No.3. Shaft

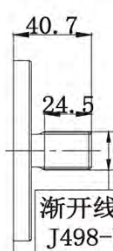

渐开线花键SAE B
J498-b 1级精度
平齿根 齿侧配合
齿数 13
齿节 16/32
压力角 30°
大径 $\phi 21.8_{-0.27}^0$

Involute spline SAE B
J498-b Class 1
Flat root Side fit spline
Number of teeth 15
Pitch 16/32
Pressure angle 30°
Major diameter $\phi 21.8_{-0.27}^0$

2号轴 (NO SAE)
No.2. Shaft

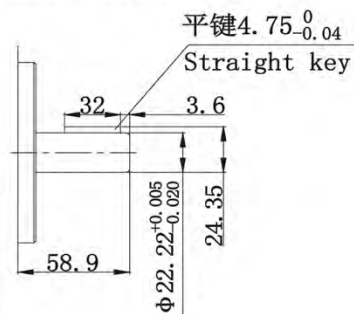


平键 4.75⁰_{-0.04}
Straight key


安装联接尺寸 Install Connection Dimensions

• T7DL 单联泵 / T7DL Single Pumps


重量 weight:40 kg

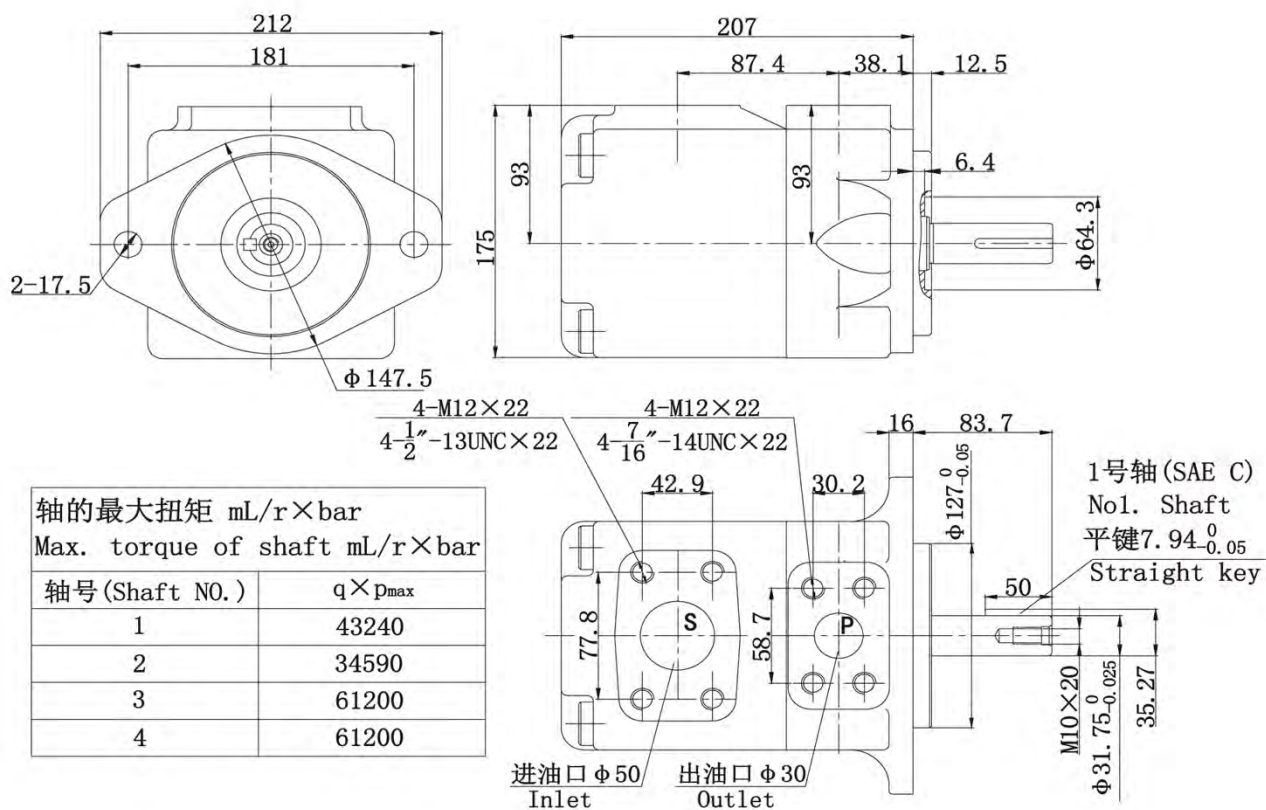


4号轴
No4. Shaft

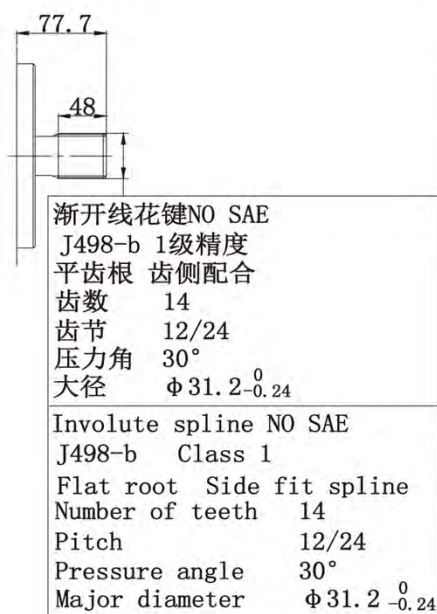

3号轴
No3. Shaft

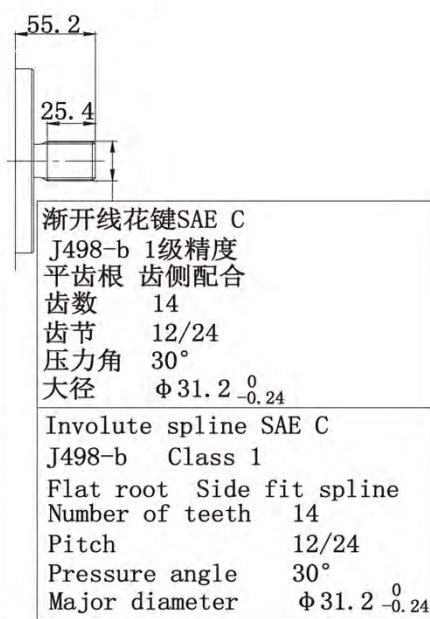

2号轴 (NO SAE)
No2. Shaft

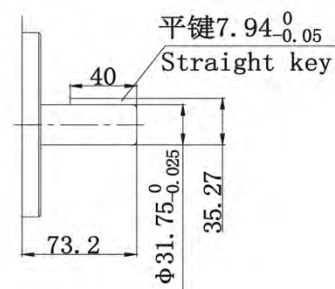

安装联接尺寸 Install Connection Dimensions

· T7EL 单联泵 / T7EL Single Pumps

重量 weight: 51.5 kg

