


1. Rated Flow : 40L/min;
2. Maximum Pressure : 315bar.
3. Relief Valve : 175bar ;
4. Port : P、 T、 C Size: G1/2;
A、 B Port Size: G3/8 ;

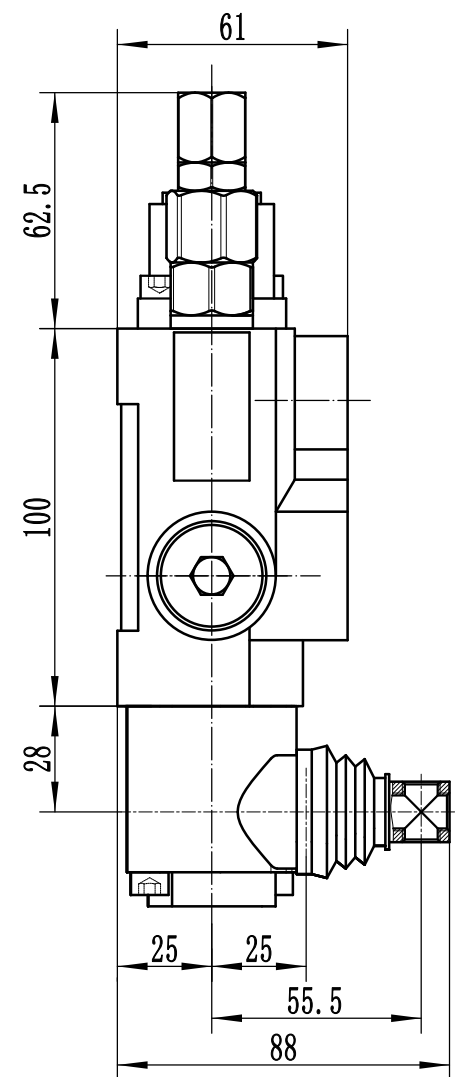