


MANDATA
OUTLET

ASPIRAZIONE
INLET



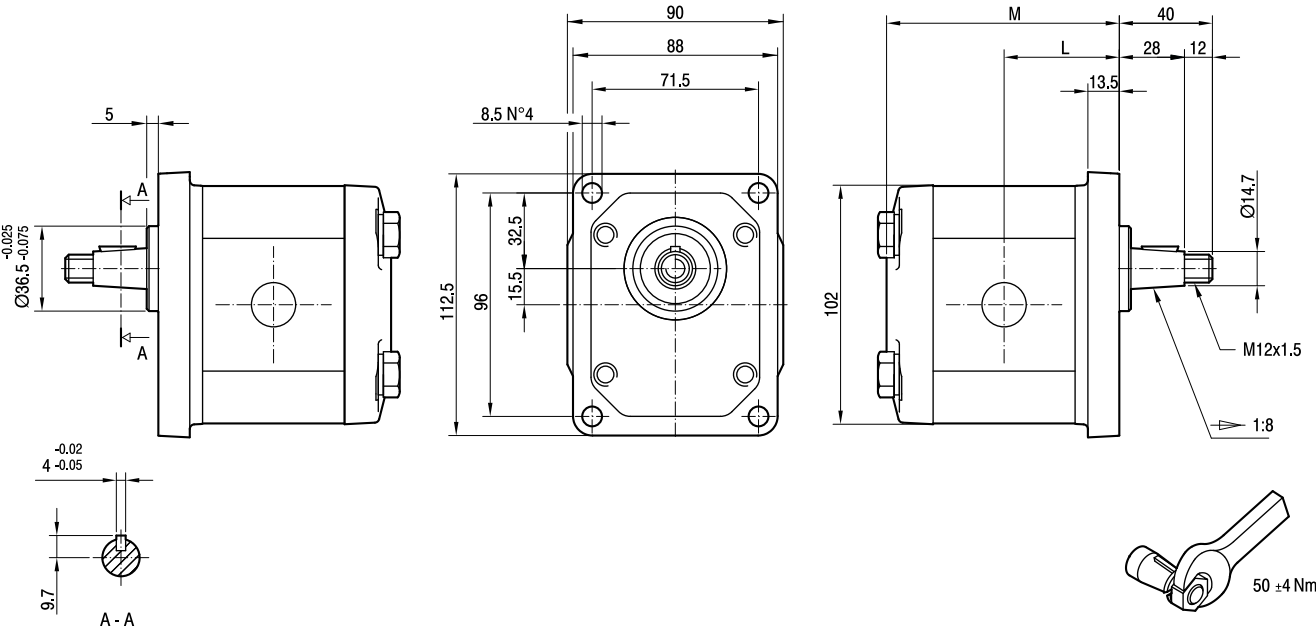


TIPO TYPE	CILINDRATA DISPLACEMENT	PORTATA a 1500 giri/min FLOW at 1500 rev/min	PRESSIONI MASSIME MAX PRESSURE			VELOCITÀ MASSIMA MAX SPEED	DIMENSIONI DIMENSIONS	
			P ₁	P ₂	P ₃		L	M
	cm ³ /giro [cm ³ /rev]	litri/min [litres/min]	bar	bar	bar	giri/min [rpm]	mm	mm
GHP2-D-6-FG	4,5	6,4	280	295	310	4000	45,5	92
GHP2-D-9-FG	6,4	9,1	280	295	310	4000	47	95
GHP2-D-10-FG	7,0	10,0	280	295	310	4000	47,5	96
GHP2-D-12-FG	8,3	11,8	280	295	310	3500	48,5	98
GHP2-D-13-FG	9,6	13,7	280	295	310	3000	49,5	100
GHP2-D-16-FG	11,5	16,4	280	295	310	4000	51	103
GHP2-D-20-FG	14,1	20,1	260	275	290	4000	53	107
GHP2-D-22-FG	16,0	22,8	260	275	290	4000	54,5	110
GHP2-D-25-FG	17,9	25,5	260	275	290	3600	56	113

FLANGE

SHAFT

PORTS



TIPO TYPE	ASPIRAZIONE INLET	MANDATA OUTLET
	A	a
GHP2...6 ÷ GHP2...16	G1/2	G1/2
GHP2...20 ÷ GHP2...40	G3/4	G1/2